

Lichtervorhänge Joylight® mit und ohne Blitzfunktion





▶ mit Blitzfunktion

◆	◆	LED	FLASH	P (W)	⌈		□
0,80 m	2,00 m	140 ✖	28 ○	14	14	30	21CBFX
0,80 m	2,00 m	140 ●	28 ○	14	14	30	21CWBFX
1,50 m	2,00 m	210 ○	30 ○	15	15	25	24CBFX
1,50 m	2,00 m	210 ●	30 ○	15	15	25	24CWBFX
1,50 m	2,00 m	210 ●	30 ○	15	15	25	24CRFX
1,50 m	2,00 m	210 ●	30 ○	15	15	25	24CBLFX
3,00 m	2,00 m	420 ○	56 ○	33	14	16	20CBFX
3,00 m	2,00 m	420 ●	56 ○	33	14	16	20CWBFX
3,00 m	2,00 m	420 ●	56 ○	33	14	16	20CRFX
3,00 m	2,00 m	420 ●	56 ○	33	14	16	20CBLFX
5,00 m	2,00 m	900 ○	90 ○	55	15	12	25CBFX
5,00 m	2,00 m	900 ●	90 ○	55	15	12	25CWBFX
5,00 m	2,00 m	900 ●	90 ○	55	15	12	25CRFX
5,00 m	2,00 m	900 ●	90 ○	55	15	12	25CBLFX
7,00 m	2,00 m	1200 ○	120 ○	80	15	8	22CBFX
7,00 m	2,00 m	1200 ●	120 ○	80	15	8	22CWBFX
10,00 m	2,00 m	1350 ○	135 ○	84	15	8	29CBFX
10,00 m	2,00 m	1350 ●	135 ○	84	15	8	29CWBFX

▶ statisch

◆	◆	LED	P (W)	⌈	☐	□
1,50 m	2,00 m	342 ○	30	18	20	24C-B
1,50 m	2,00 m	342 ●	30	18	20	24CW-B
3,00 m	2,00 m	540 ○	35	18	15	20C-B
3,00 m	2,00 m	540 ●	35	18	15	20CW-B
5,00 m	2,00 m	900 ○	65	18	9	25C-B
5,00 m	2,00 m	900 ●	65	18	9	25CW-B
7,00 m	2,00 m	1080 ○	72	18	9	22C-B
7,00 m	2,00 m	1080 ●	72	18	9	22CW-B
10,00 m	2,00 m	1350 ○	58	18	10	29C-B
10,00 m	2,00 m	1350 ●	58	18	10	29CW-B

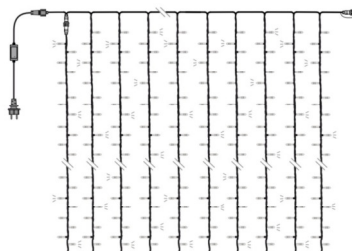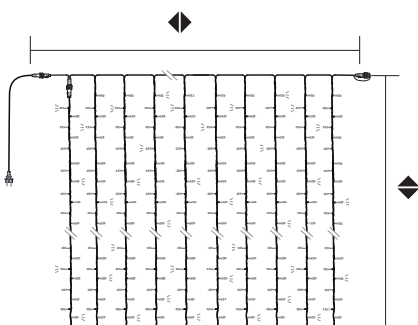

Produktinformationen

Ideal für die Dekoration von Fassaden, Bäumen oder für Straßenüberspannungen.

Bis zu 30 Vorhänge an einen Anschluss koppelbar.

Kompatibel mit dem gesamten Sortiment. mit dem OctoPlus® von Blachere Illumination.