



■ Features :

- Constant current mode power supply
- Universal AC input / Full range
- Withstand 300VAC Surge input for 5 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP30 design
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Low cost / High reliability
- 2 years warranty

SPECIFICATION



(only for APC-25-500)



(only for APC-25-700&1050)




(except for APC-25-350)




| MODEL | APC-25-350 | APC-25-500 | APC-25-700 | APC-25-1050 | |
|-----------------------|--|---|--------------|------------------------------------|----------|
| OUTPUT | RATED CURRENT | 350mA | 500mA | 700mA | 1050mA |
| | DC VOLTAGE RANGE | 25~70V | 15~50V | 11~36V | 9~24V |
| | RATED POWER | 24.5W | 25.2W | 25.2W | 25.2W |
| | RIPPLE & NOISE (max.) Note.2 | 300mVp-p | 300mVp-p | 300mVp-p | 300mVp-p |
| | VOLTAGE TOLERANCE Note.3 | ±5.0% | | | |
| | CURRENT ACCURACY | ±8.0% | | | |
| | LINE REGULATION | ±1.0% | | | |
| | LOAD REGULATION | ±3.0% | | | |
| | SETUP, RISE TIME | 1500ms, 30ms / 230VAC | | 1500ms, 30ms / 115VAC at full load | |
| HOLD UP TIME (Typ.) | 20ms/230VAC | 12ms/115VAC at full load | | | |
| INPUT | VOLTAGE RANGE Note.4 | 90 ~ 264VAC | 127 ~ 370VDC | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | |
| | EFFICIENCY(Typ.) | 83% | 83% | 83% | 83% |
| | AC CURRENT | 0.4A/230VAC; 0.8A/115VAC | | | |
| | INRUSH CURRENT(Typ.) | COLD START 45A(twidth=310µs measured at 50% Ipeak) at 230VAC | | | |
| | MAX. No. of PSUs on 16A CIRCUIT BREAKER | 9 units (circuit breaker of type B) / 15 units (circuit breaker of type C) at 230VAC | | | |
| LEAKAGE CURRENT | 0.25mA / 240VAC | | | | |
| PROTECTION | OVER VOLTAGE | 76 ~ 94V | 55 ~ 68V | 41 ~ 49V | 27 ~ 35V |
| | | Protection type : Shut down o/p voltage, re-power on to recover | | | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ 70°C (Refer to "Derating Curve") | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +80°C, 10 ~ 95% RH | | | |
| | TEMP. COEFFICIENT | ±0.2%/°C (0 ~ 50°C) | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | |
| SAFETY & EMC (Note 5) | SAFETY STANDARDS | UL8750 (except for APC-25-350), CSA-C22.2 No. 250.0-13 (only for APC-25-700&1050) approved; design refer to EN60950-1 | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC | | | |
| | ISOLATION RESISTANCE | I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH | | | |
| | EMC EMISSION | Compliance to EN55022, EN61000-3-2 Class A, EN61000-3-3 | | | |
| | EMC IMMUNITY | Compliance to EN55024, EN61000-4-2, 3, 4, 5, 6, 8, 11; light industry level (surge 2KV), criteria A | | | |
| OTHERS | MTBF | 518.9K hrs min. MIL-HDBK-217F (25°C) | | | |
| | DIMENSION | 84*57*29.5(L*W*H) | | | |
| | PACKING | 0.13Kg; 72pcs/10.4Kg/0.92CUFT | | | |
| NOTE | <p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µf & 47µf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltage. Please check the static characteristic for more details.</p> <p>5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> <p>6. The unit might not be suitable for lighting applications in EU countries. Please check with your local authorities for the possible use of the unit.</p> | | | | |

Mechanical Specification


Case No.PCD16A Unit:mm

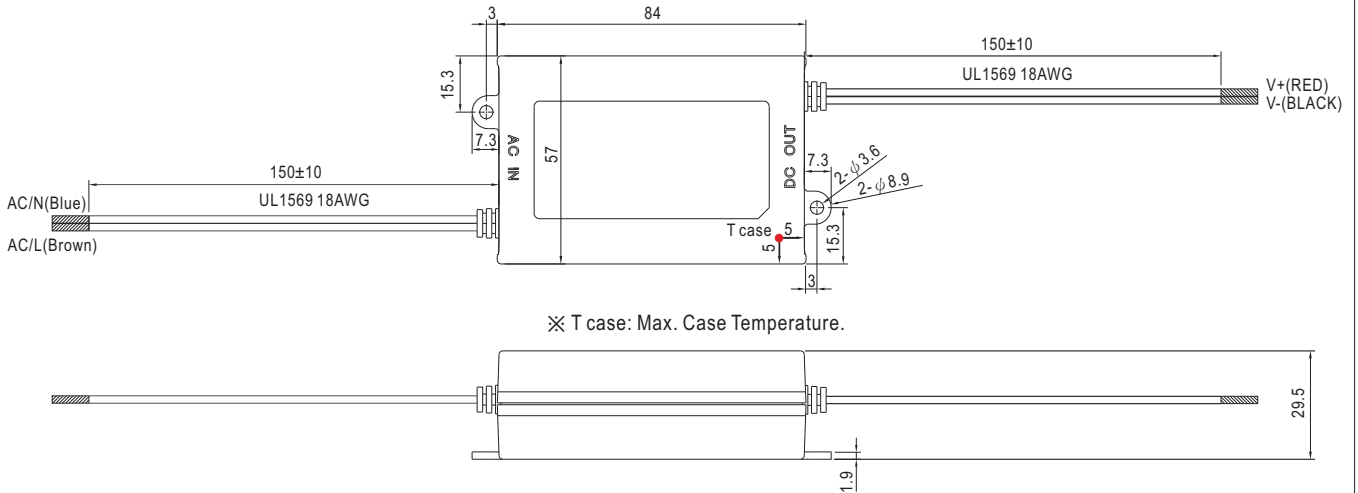

Block Diagram

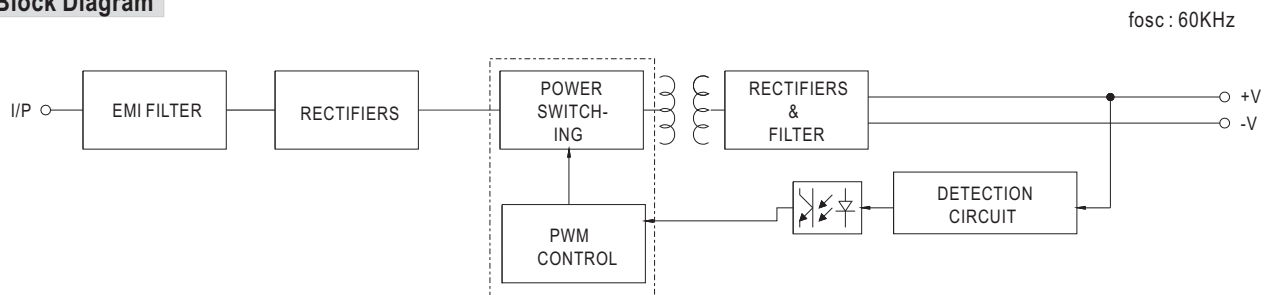

Derating Curve

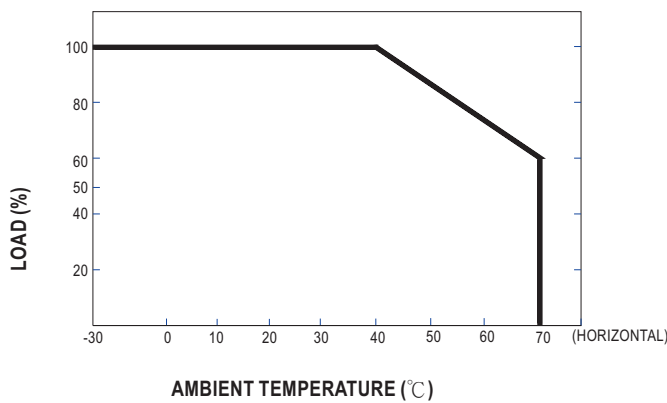

Static Characteristics

